



Epulse100 Connectors

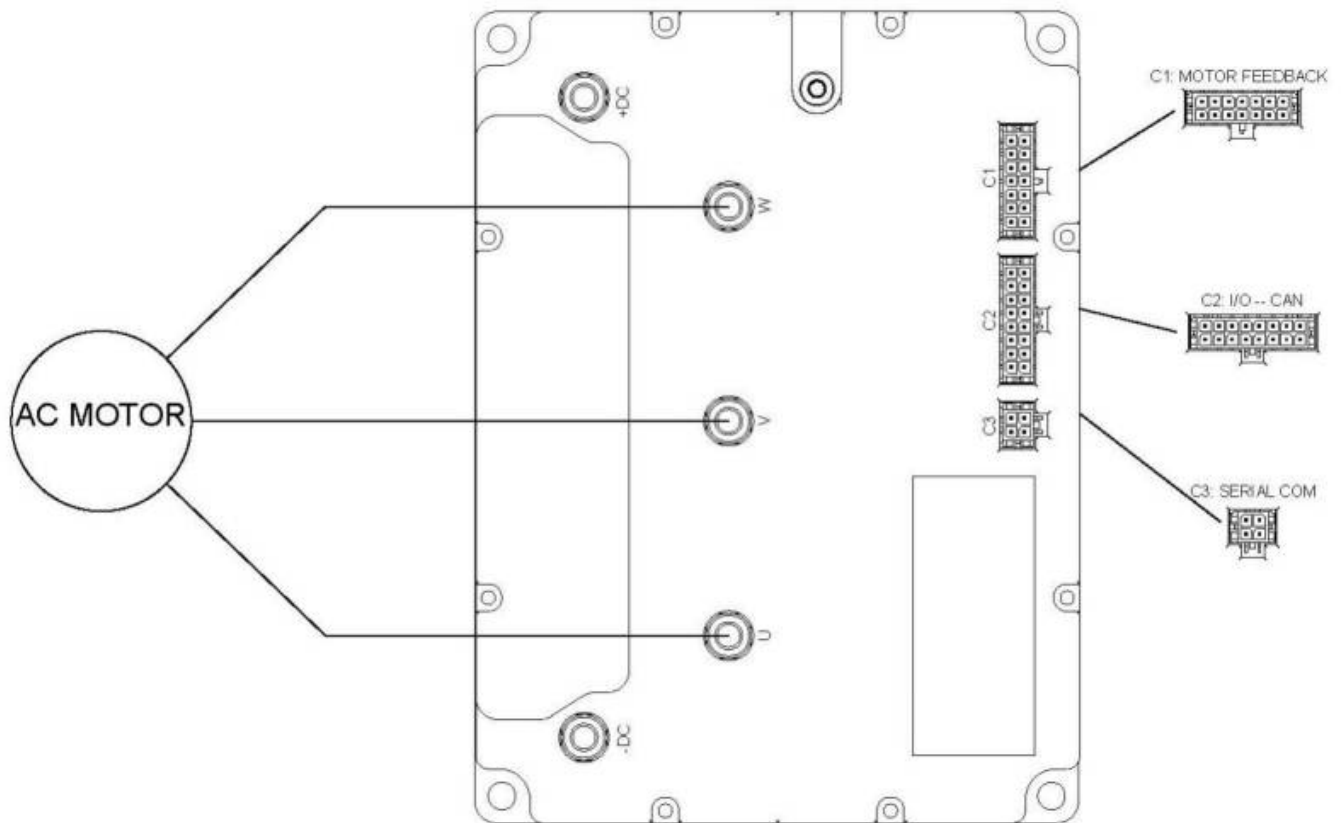

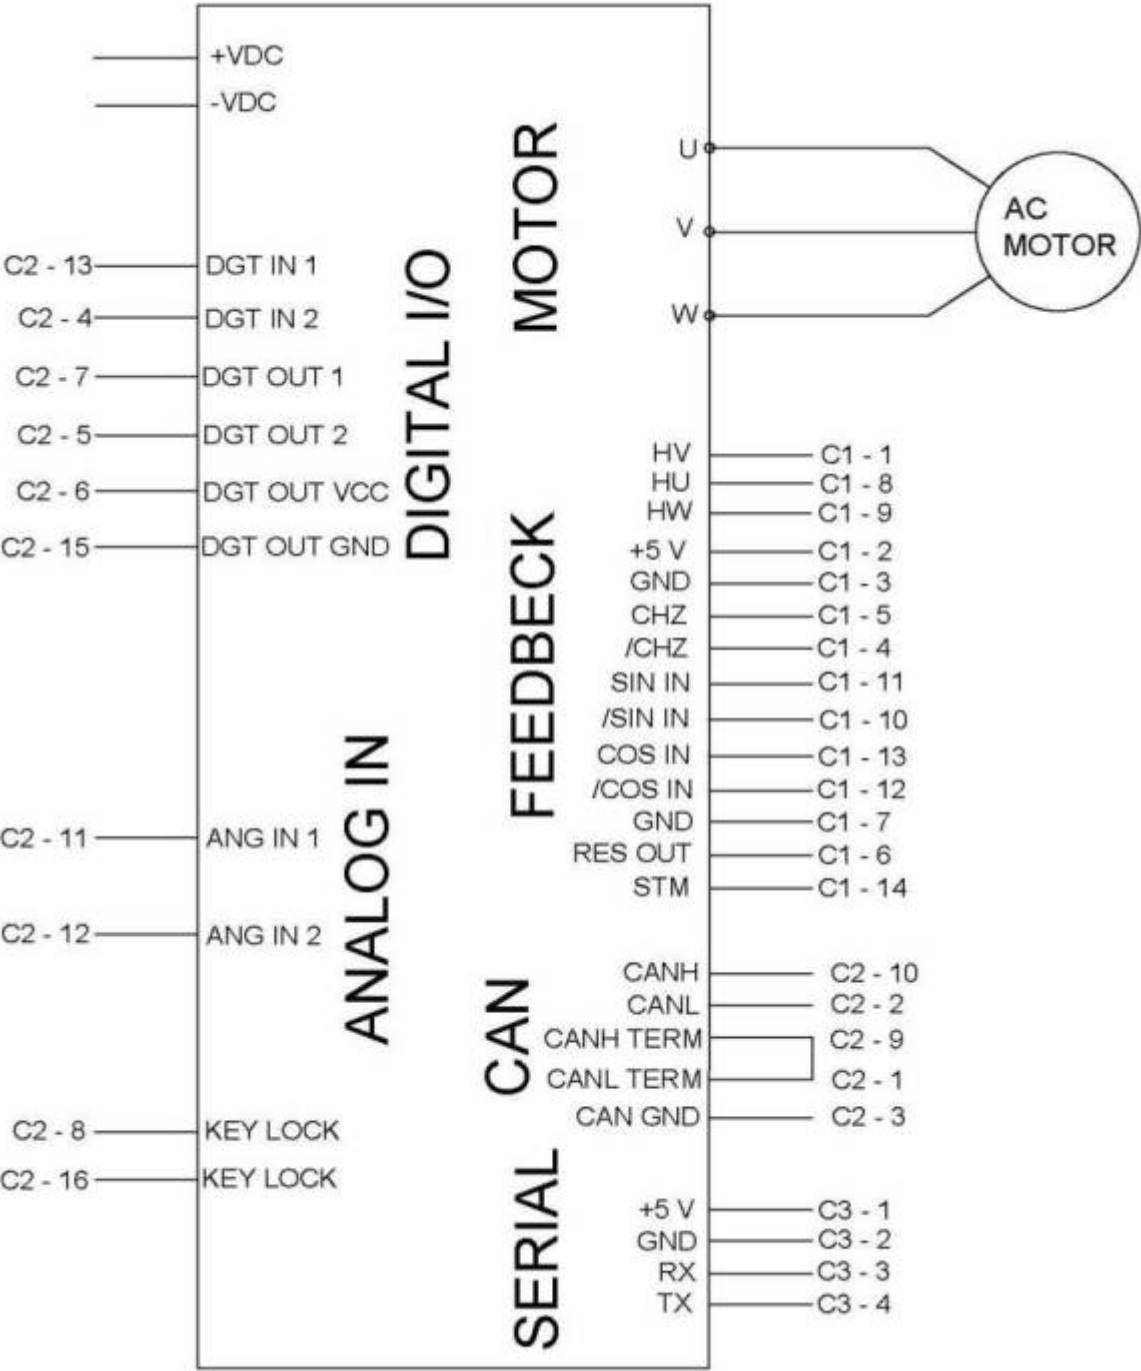

Connector types

Port	Ordering Code	Brand	Description
C3	43025-0400	Molex	4 poles male, for serial communication (Receptacle Housing)
C2	43025-1600	Molex	16 poles male, for input/output/can (Receptacle Housing)
C1	43025-1400	Molex	14 poles male, for motor feedback (Receptacle Housing)
-	43030-0007	Molex	Crimp Terminal, 20-24 AWG
-	79758-0010	Molex	pre-Crimped Lead Micro-Fit 3.0 Female-to-Micro-Fit 3.0 Female Tin Plated, 300mm, 20AWG
-	11-03-0043	Molex	Etraction tool

-	TTL-232R-3V3-WE	NILAB	UART/TTL3V3 Converter
---	-----------------	-------	-----------------------

From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:epulse50_dc_servodrive:connectors_100

Last update: **2026/09/11 07:53**

