


GDi - Green Drive ISO 15552

This landing page is the entry point for the **GDi — Green Drive ISO 15552** product family. The family is designed as a direct drop-in replacement for pneumatic cylinders and is well suited for the same applications.

The Green Drive ISO 15552 series is particularly suitable for replacing pneumatic actuators. The motors are available in 6 sizes with two flange dimensions: from 45×45 mm to 70×70 mm. Windings are available for both high voltage (230/480 VAC) and low voltage (24/48 VDC).

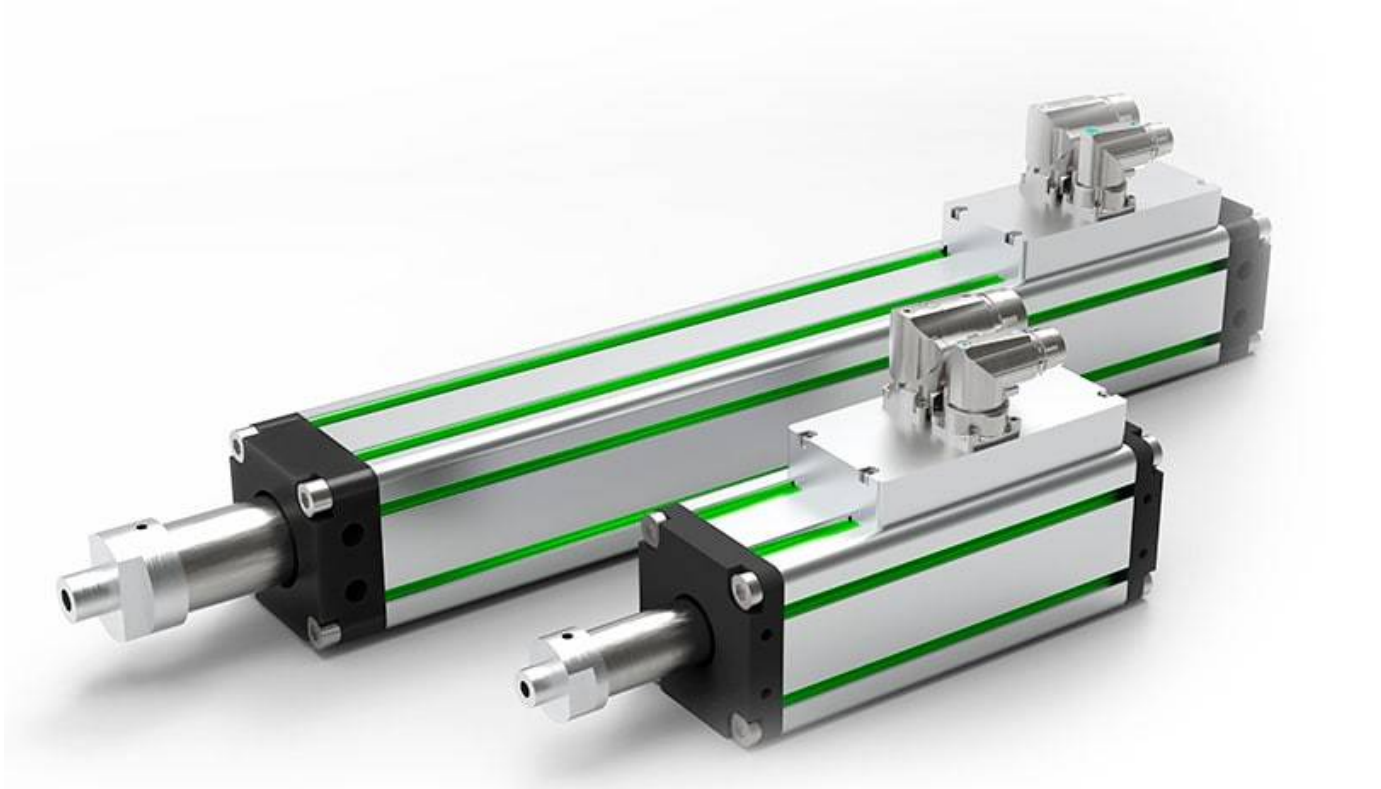

What you will find here

Topic	Page
Technical data	Technical data
Dimensions	Dimensional details
Mounting	How to mount the stator
Connection	Connection system
Cable	Cable configuration

Encoder	Encoder
Servo drives	Servo compatibility

Key characteristics

- ISO 15552 standard flange — direct replacement for pneumatic cylinders. - Two flange dimensions (45×45 mm and 70×70 mm) and 6 motor sizes. - High-voltage (230/480 VAC) and low-voltage (24/48 VDC) windings. - Integrated encoder feedback and thermal protection.

From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:green_drive_iso:start

Last update: **2026/09/11 07:54**

