


Accessories

Maglift

The Maglift can be mounted beneath the linear-rotary motor, or on either the left or right side. Upon request, accessories can be delivered pre-assembled. To facilitate this, please provide the ordering information below when placing your order.

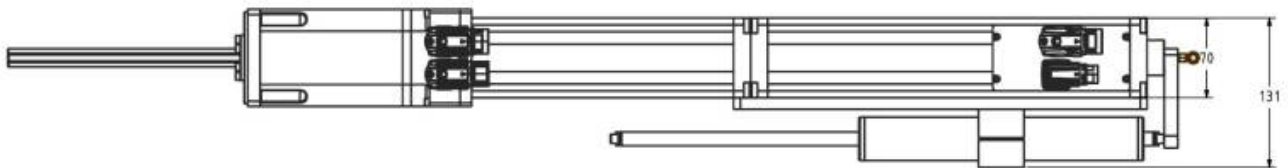

Pneumatic brake

An optional pneumatic brake can be integrated and controlled directly by the Servo Drive. To operate the brake, an additional electric solenoid valve is required. The brake acts on a shaft parallel to the slider and is released via compressed air.

Cam Follower

In the event of a power failure, the cam guide forces the moving component of the motor upward and out of the collision zone, effectively preventing the axis from colliding with other objects.



From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:green_drive_iso_rotolinear:accessories

Last update: **2026/09/11 07:54**

