


NL-EB15 Compact safety light curtain


The EB15 safety light curtain has a unique structure: the emitting light surface is a compact 15 mm size, and light is emitted from the side. It offers multiple output signals, easy installation, and simple cable connection. Its quick response time ensures reliable performance.

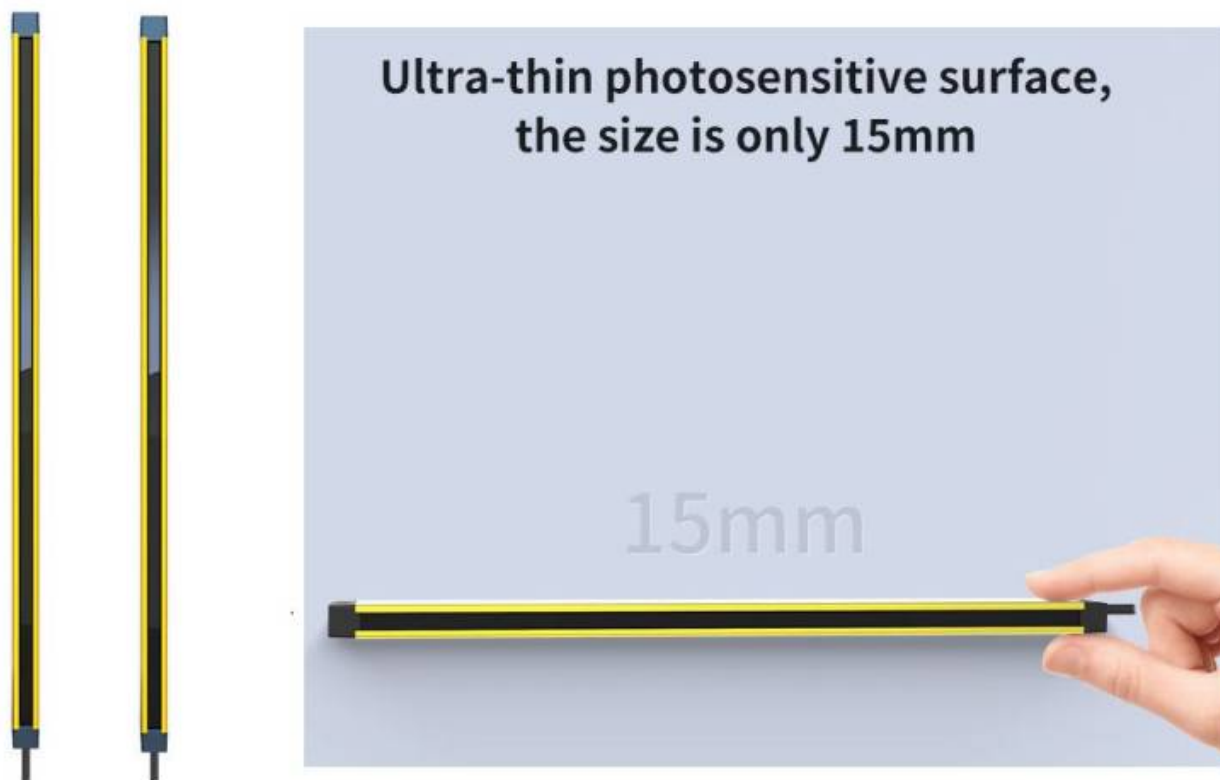

Product feature

Item
Ultra-thin photosensitive surface, only 15 mm in size
Quick response: the fastest response time is less than 1 ms
Low wide-voltage power supply: the working voltage is 10 to 30 VDC
Good resistance to electromagnetic interference and to the electromagnetic influence of various equipment motors
Wire synchronization technology to effectively resist light interference
Easy to install thanks to the fixed end cover
The section size is 39×15 mm

What is provided with the safety curtain?

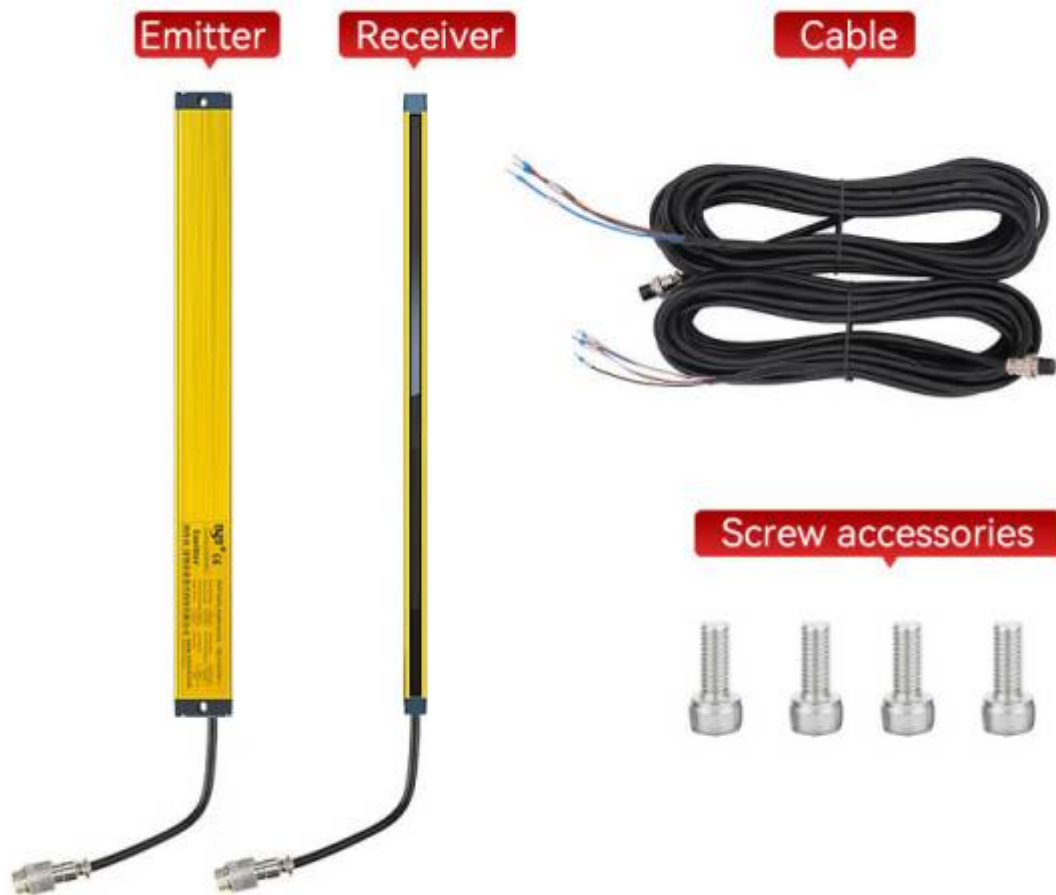

From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:nl_eb15_safety:start

Last update: **2026/09/11 07:59**

