


Power cable

This page describes the **power cable** of the RM linear stage. The stage is equipped with a 1-meter cable with an M23 standard Speedtec connector at the cable end.

The linear stage is equipped with a 1-meter cable with an M23 standard Speedtec connector at the cable end.



Pinout - Power connector BKUA145NN00420200400 (Serie 923 - 9 poles)

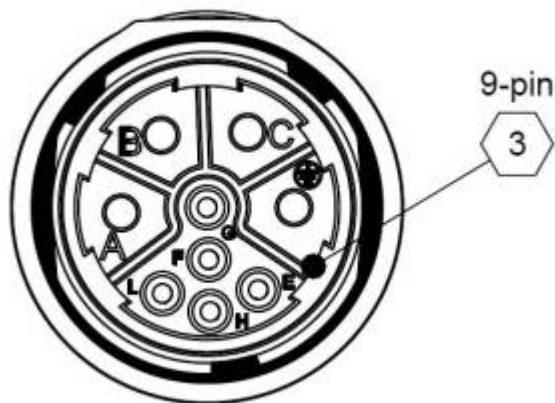

PIN	Signal
A	U phase
B	V phase
C	W phase
D/PE	Protection Earth
F	Thermal switch+
G	Thermal switch-
L	not connected
H	not connected

CASE	Shield
------	--------

Wiring notes

- The cable is supplied with a 1-meter length and an M23 Speedtec connector. - The connector is a 9-pole type (Serie 923) with the pin assignment shown above. - Connect the phases (U, V, W), the protection earth, and the thermal switch. - Verify the pin assignment and the cable routing before commissioning.

From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:rm_linear:power_cable

Last update: **2026/09/11 07:59**

