


RM Linear Axis


This landing page is the entry point for the **RM Linear Axis**. The axis is designed for high-speed, high-acceleration applications with an integrated linear guide and an absolute encoder.

This series is designed for high-speed, high-acceleration applications. The linear axis includes a high-performance linear guide and an absolute encoder. Different strokes are available.

Target applications are diaper production, wrapping machines, packaging machines, and food and beverage production.

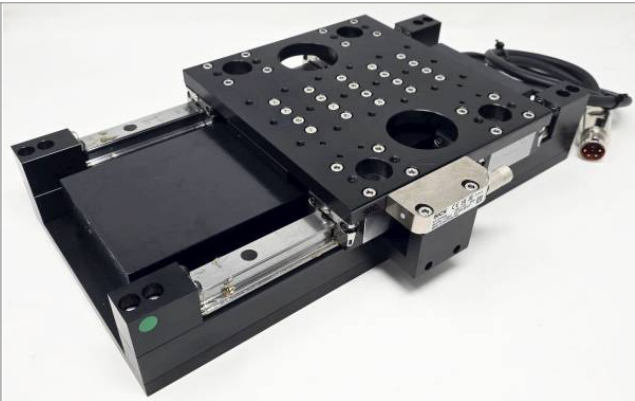

Video

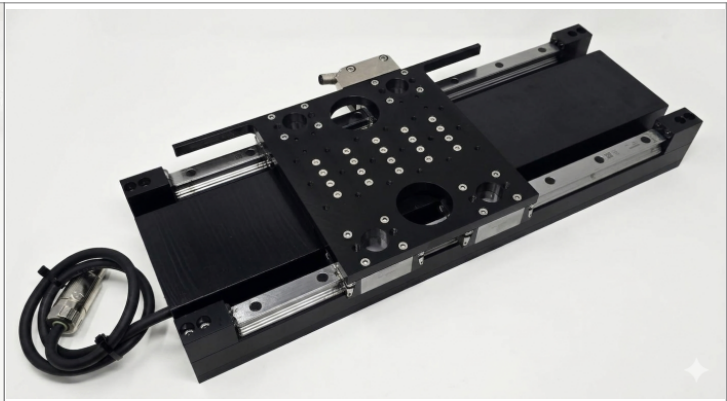


Video

What you will find here

Topic	Page
Technical data	Technical data
Dimensions	Dimensional details
Power cable	Power cable
Encoder	Encoder
Lubrication	Lubrication
Dismounting	Dismounting

Key characteristics

- High-speed, high-acceleration linear axis.
- High-performance linear guide and absolute encoder.
- Different stroke versions available.
- Suitable for packaging, wrapping, and food and beverage applications.



From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=en:rm_linear:start

Last update: **2026/09/13 13:49**

