


Epulse30 Connectors

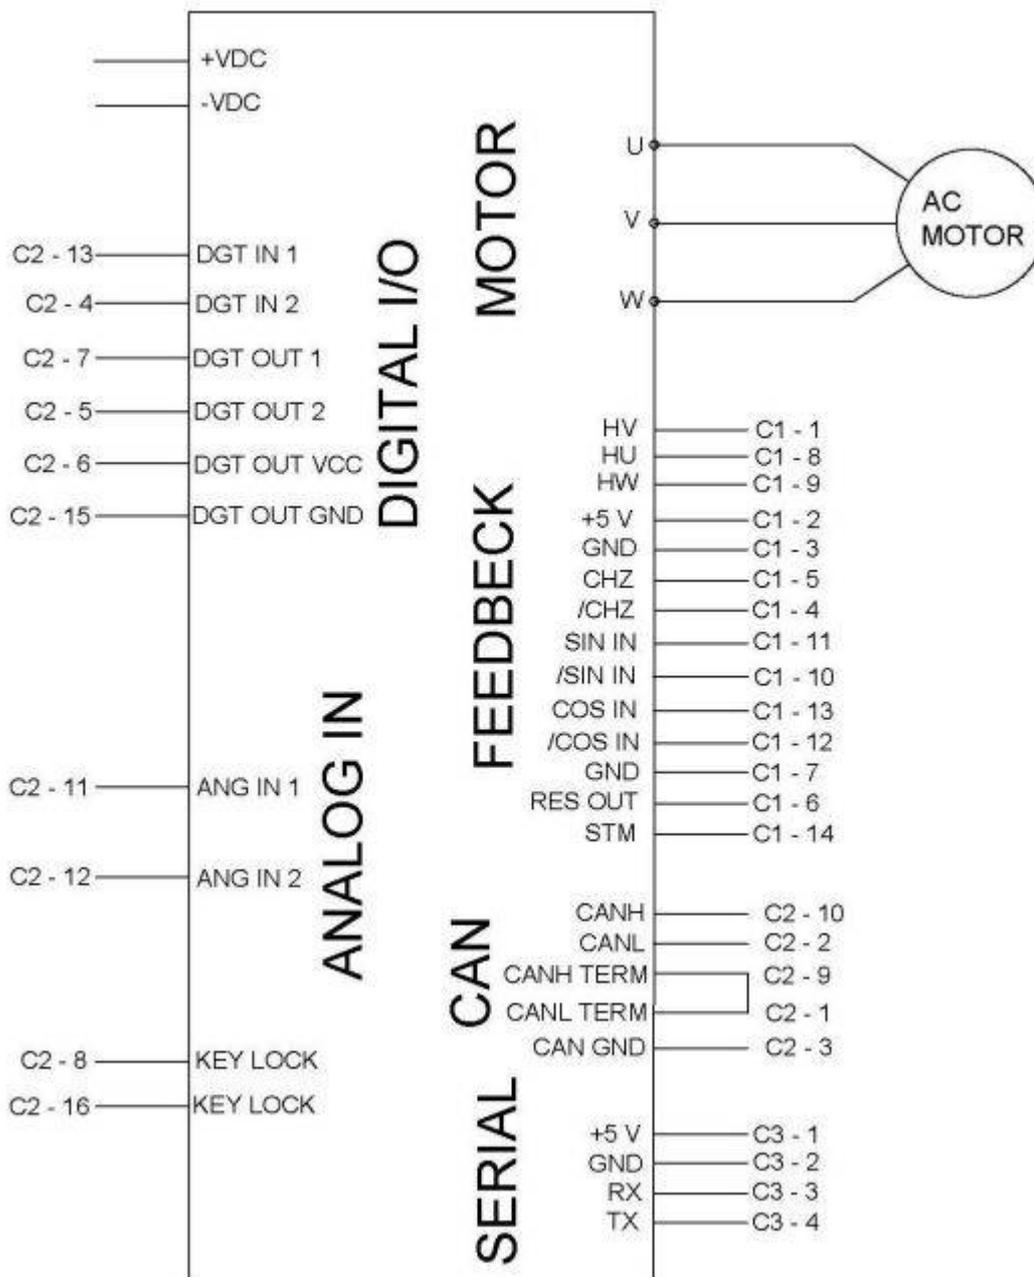

Connector types

| Port | Ordering Code | Brand | Description |
|------|---------------|-----------|---|
| C3 | 501939-0400 | PicoClasp | 4 poles flying, for serial communication (Receptacle Housing) |
| C2 | 501189-2010 | PicoClasp | 20 poles flying, for input/output/can (Receptacle Housing) |
| C1 | 501330-0800 | PicoClasp | 8 poles flying, for motor feedback (Receptacle Housing) |

| | | | |
|---|-----------------|-----------|--|
| - | 501193-7000 | PicoClasp | Crimp Terminal, 20-24 AWG |
| - | 079758-1017 | PicoClasp | Pre-Crimped Lead MicroClasp Female, 300mm, 28AWG |
| - | TTL-232R-3V3-WE | NiLAB | UART/TTL3V3 Converter |

From:

<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**
Knowledgebase

Permanent link:

https://www.nilab.at/dokuwiki/doku.php?id=epulse50_dc_servodrive:conn_30

Last update: **2024/07/30 14:00**

