

Startup and operation

In order to start up the motor and configure for machine operation, please refer to NiLAB Starter documentation. NiLAB Starter is a Windows based PC software for programming and configuring the integrated drive linear motors.


This software can be downloaded here :https://www.nilab.at/dokuwiki/doku.php?id=nilab_starter:start

How to connect and program the motor using PC using programming cable



In order to program the integrated linear motor using NiLAB Starter software you need the programming cable DA012060. This cable converts the USB to RS232/RS485. The programming cable is provided with a connector box compatible with connectors used with NLI080Q/X and NLI120QX.


First step is to plug the USB cable into the PC and see what is the related COM port using the Windows Device Manager. For example, here COM7 corresponds to the USB to RS232/RS485 programming cable.

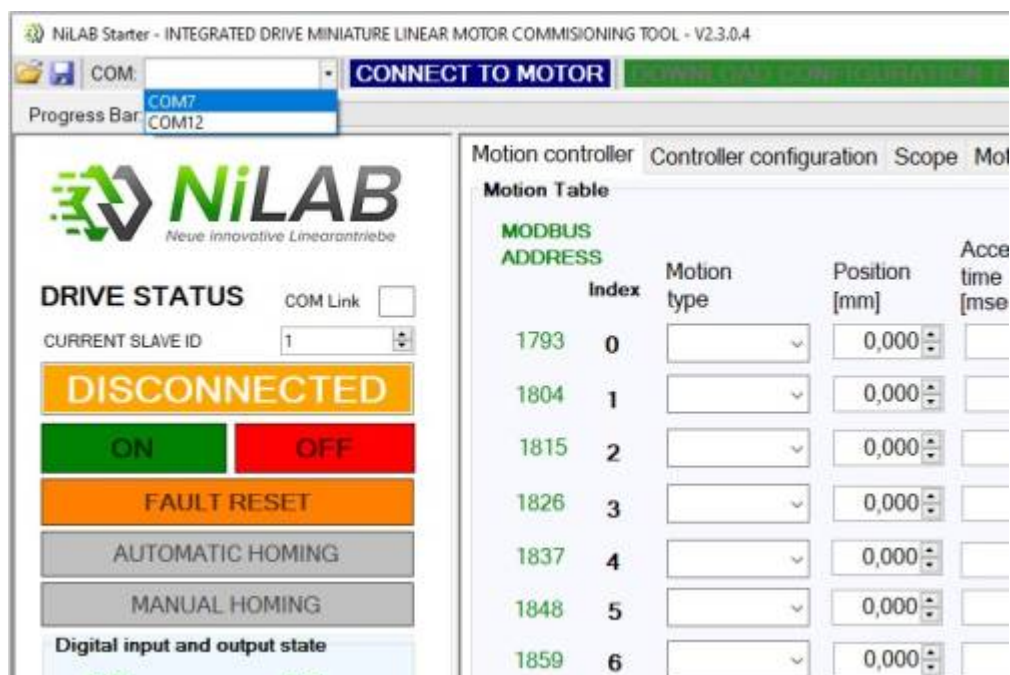

Then, you have to select the right one on the combobox list in the NiLAB Starter Software and then press the button "Connect to Motor".

How to connect and program the motor using PC using USB to RS485 with two motors

Please note that the two motor must have different ID Nodes values (Parameter 1)

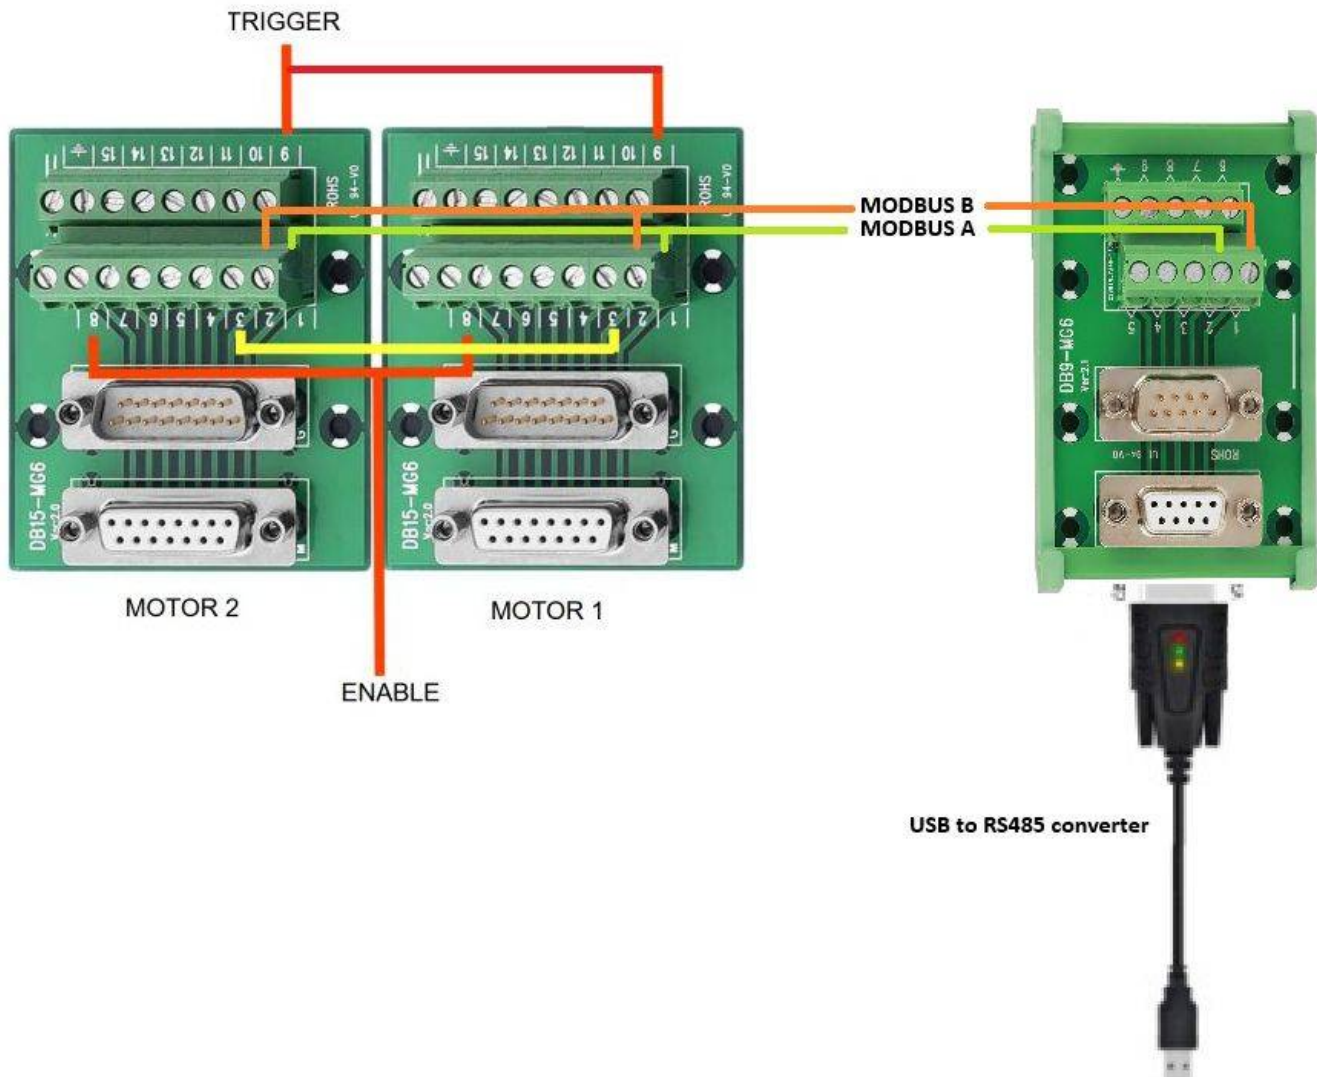

From:
<https://www.nilab.at/dokuwiki/> - NiLAB GmbH
Knowledgebase

Permanent link:
https://www.nilab.at/dokuwiki/doku.php?id=integrated_drive_motors:startup_and_operation

Last update: 2025/11/19 13:45

