


# NL-EB15 Compact safety light curtain


EB15 safety light curtain has a unique structure - emitting light surface is 15mm compact size, light is emitted from side. Multiple output signal, easy installation and cable connection. Meanwhile, quick response time to ensure reliable performance.

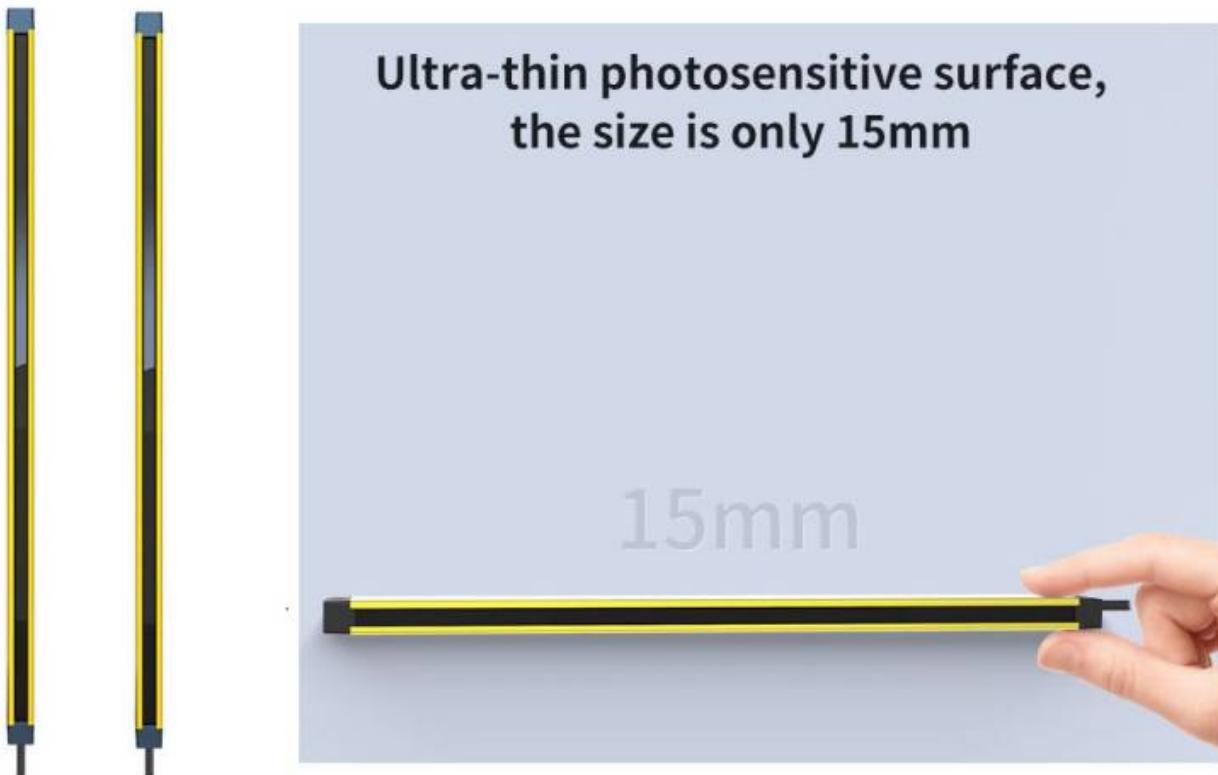

## Product feature

- Ultra-thin photosensitive surface, the size is only 15mm
- Quick response, the fastest response time < 1msec.
- Low wide voltage power supply, the working voltage is 10 to 30VDC.
- Good performance to resist electromagnetic interference, and resist influence by electromagnetic of various equipment motors.
- Wire synchronization technology to resist light interference effectively.
- Easy to install cause of fixed end-cover.
- The section size is 39x15mm

## What is provided with the Safety curtain ?

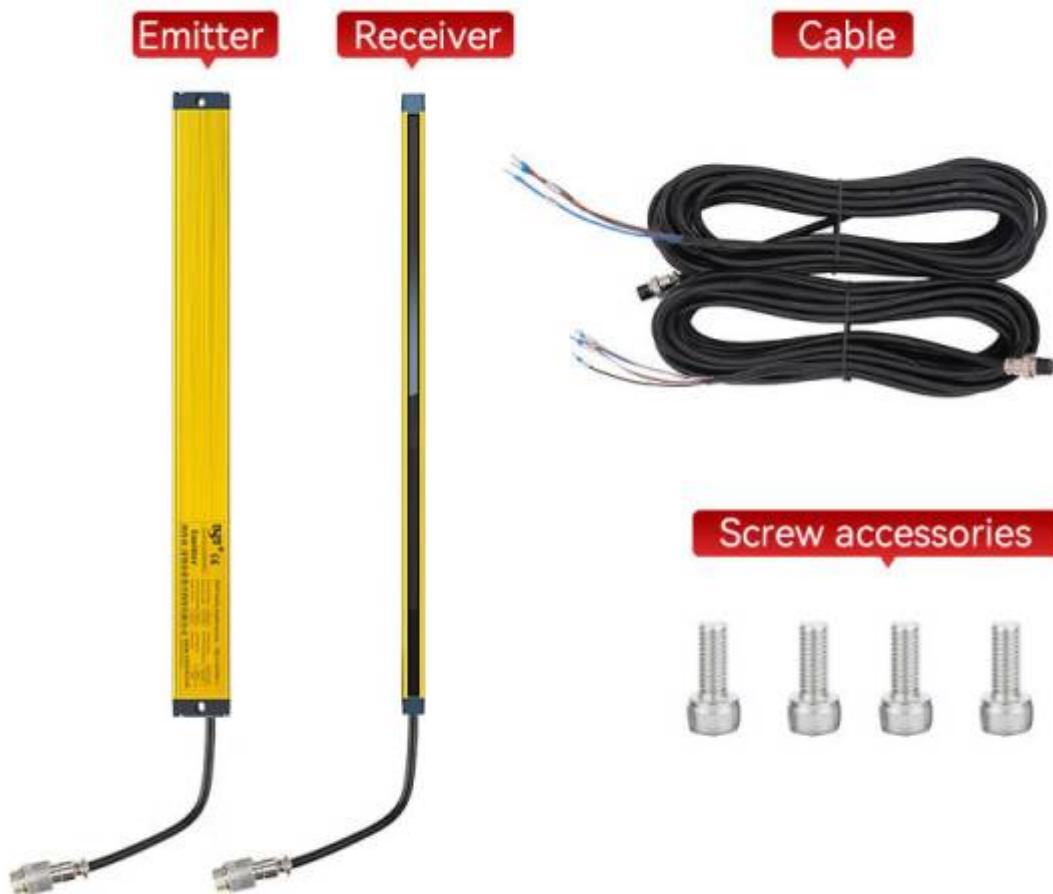

From:  
<https://www.nilab.at/dokuwiki/> - **NiLAB GmbH**  
**Knowledgebase**

Permanent link:  
[https://www.nilab.at/dokuwiki/doku.php?id=nl\\_eb15\\_safety:start](https://www.nilab.at/dokuwiki/doku.php?id=nl_eb15_safety:start)

Last update: **2025/12/02 15:05**

