


# Linear guide

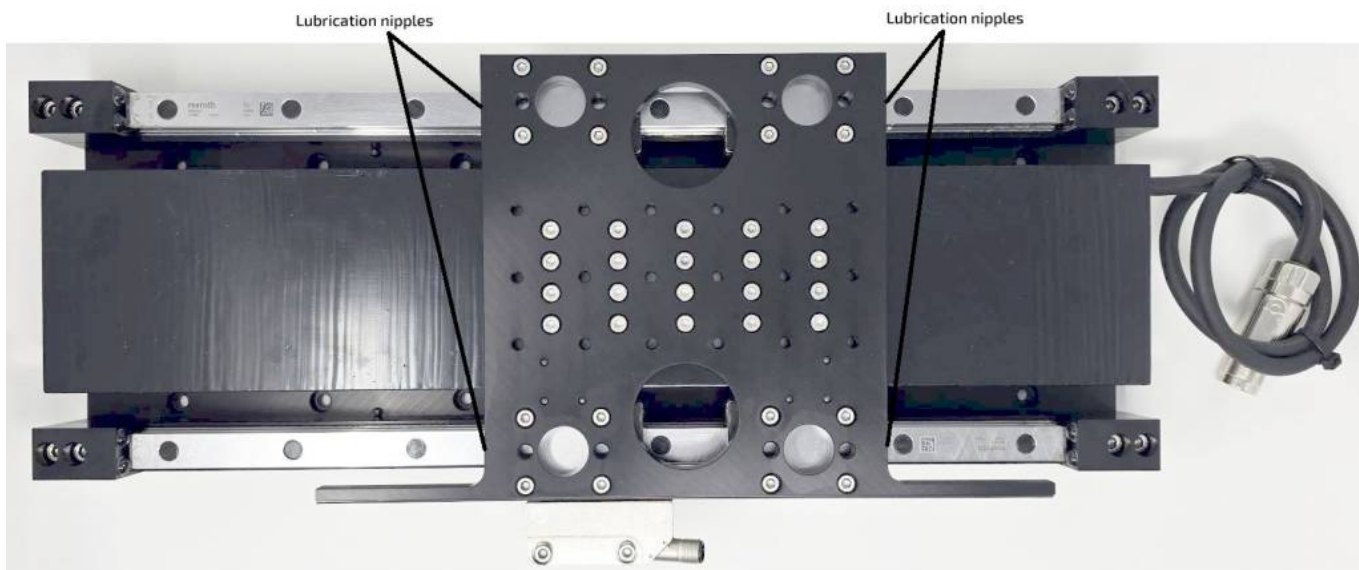

The linear guiding system is based on high performance Bosch Linear guides designed for high acceleration and high speed movements.

The system is composed by 4 linear guide blocks size 20 carbon steel (medium preload) with 4 independent lubrication nipples.

**Lubrication** use is Roller bearing grease Dynalub 510.

## Linear guide performance

Parameter	Value	Unit
Maximum acceleration	500	m/sec
Maximum speed	5	m/sec
Dynamic load capacity per block C50	29.5	kN
Static load capacity per block C0	29.8	kN
Accuracy class	H	
Preload class	C2	
Permissible ambient temperature	-10 / +80	degrees
Typical lubrication frequency at high speed / high acceleration	1000	km

From:  
<https://www.nilab.at/dokuwiki/> - NiLAB GmbH  
 Knowledgebase

Permanent link:  
[https://www.nilab.at/dokuwiki/doku.php?id=rm\\_linear:lubrification](https://www.nilab.at/dokuwiki/doku.php?id=rm_linear:lubrification)

Last update: 2026/06/01 12:56

