
Product size

This page shows the **product size** of the NL-EB15 safety device. The dimensions depend on the cover version.

Metal cover version

The drawing below shows the dimensions of the metal cover version.

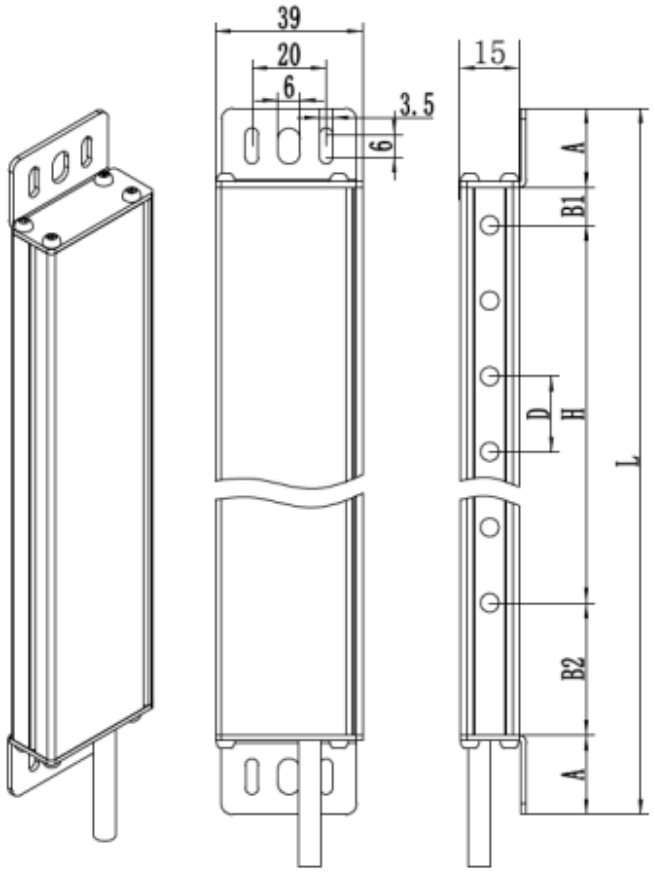


Metal cover

A: Upper and bottom cover
B1: Upper stop-work range
B2: Bottom stop-work range
D: Beam space
H: Protective height
L: Total height

A=20mm;
When D=10mm, B1=5mm; B2=25mm
When D=20mm, B1=5mm; B2=15mm
When D=40mm, B1=5mm; B2=15mm
L is total height: L=A1+A2+B1+B2+H
H is protective height: H=(beams-1) * beam space

Plastic cover version

The drawing below shows the dimensions of the plastic cover version.

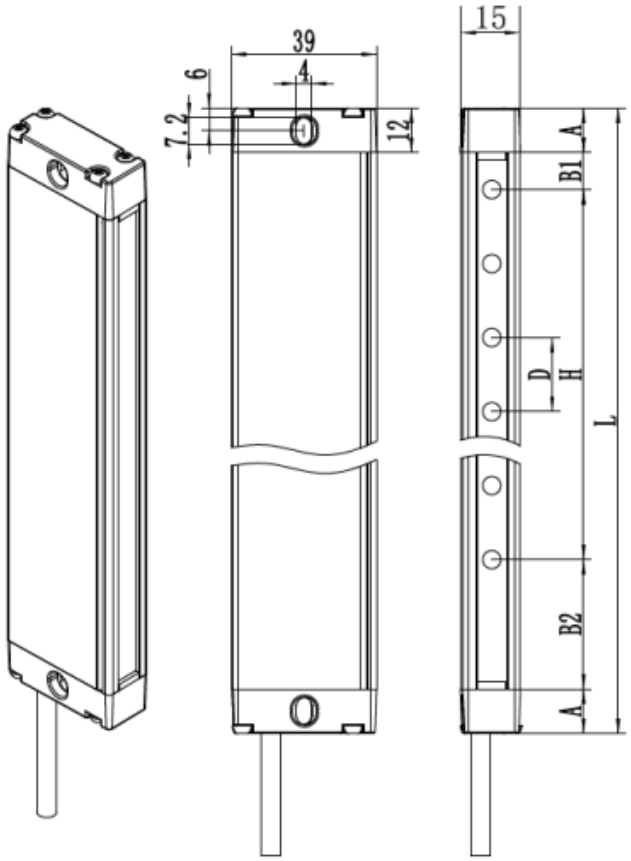

Plastic cover

A: Upper and bottom cover
B1: Upper stop-work range
B2: Bottom stop-work range
D: Beam space
H: Protective height
L: Total height

A=12mm;
When D=10mm, B1=5mm; B2=25mm
When D=20mm, B1=5mm; B2=15mm
When D=40mm, B1=5mm; B2=15mm
L is total height: L=A1+A2+B1+B2+H
H is protective height: H=(beams-1) * beam space

Notes

- The overall dimensions are shown for both cover versions. - Verify the mounting clearance and the cable routing before installation. - The dimensions are nominal; refer to the installation picture page for the mounting accessories.

From:
https://www.nilab.at/dokuwiki/ - **NiLAB GmbH Knowledgebase**

Permanent link:
https://www.nilab.at/dokuwiki/doku.php?id=en:nl_eb15_safety:size

Last update: **2026/09/11 07:59**