

# Motor memory dump

Memory dump window is used to save and load the content of the motor memory. All the modbus register from starting address 0 to address 1902.

**The uPLC memory area is not downloaded using this memory dump window.**


Pressing the button (1) - Download Data from motor and save to file, all the 1902 registers are read and stored inside a file with .par extension.

Pressing the button (2) - Read file and download data to motor, the file is read and the 1902 registers are written inside the motor memory.

During download, if the option (4) is checked, the value inside the file is compared with the value inside the motor. If the value is the same, no write is performed.

If the value is different, the value is stored inside the motor memory and the counter (5) of the changed register will increase.

If the option (3) is checked, the window starter interface is updated with the new value uploading the new stored value from motor memory.

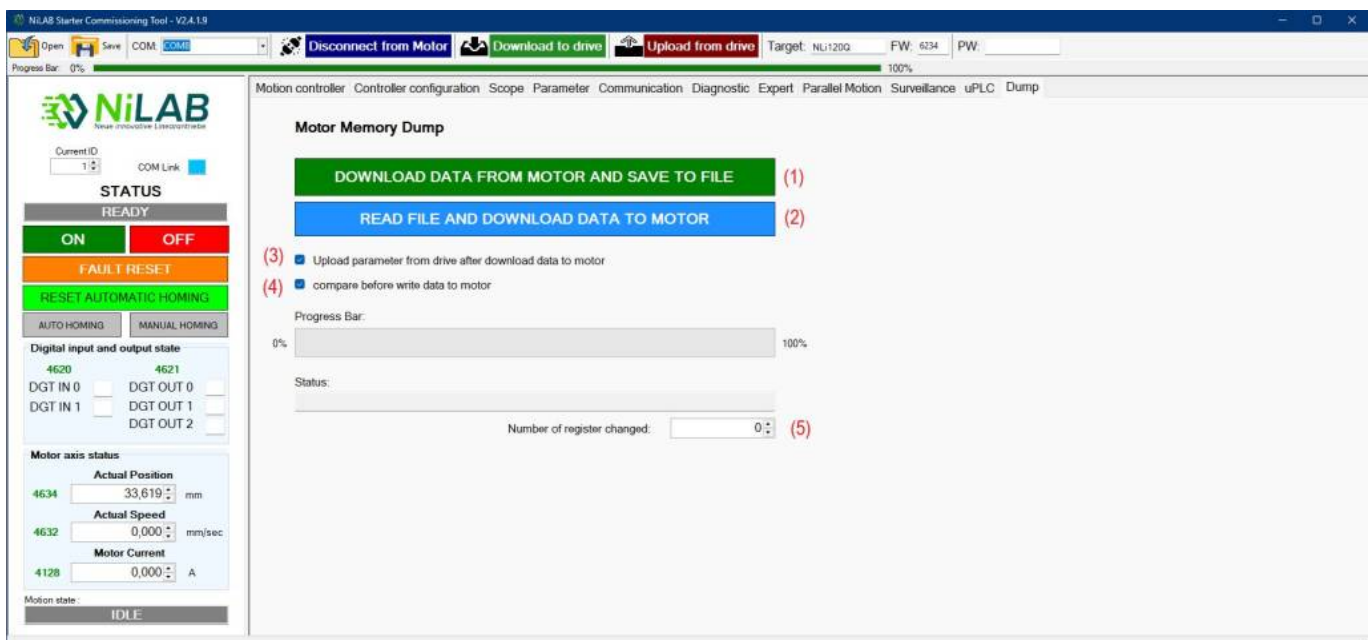

Please note that, to confirm the downloaded values you need to go to Parameter and press Write configuration to flash.

From:

<https://www.nilab.at/dokuwiki/> - NiLAB GmbH  
Knowledgebase

Permanent link:

[https://www.nilab.at/dokuwiki/doku.php?id=nilab\\_starter:dump](https://www.nilab.at/dokuwiki/doku.php?id=nilab_starter:dump)

Last update: **2025/08/23 08:17**

